



Intuitive and easy-to-use.



Low water consumption: 2-2.5 liters.



Double thermoplastic washing and rinsing arms.



Independent cycle for cold rinsing in 400 x 400 mm models. Complete filtering system to keep clean water longer.



Compact design, with double-wall door, increases security and soundproofing.



Built-in automatic rinse aid and optional detergent dispensers.



Structure fully made of stainless steel.



Safety thermostat and anti-backflow valve.

Asber Easy Wash pass-through models allow washing all kinds of dishware up to 420 mm high. Hood-type dishwashers can be installed in line or in a 90° angle configuration. They ensure excellent washing and rinsing results, combined with outstanding hygiene, keeping a high level of productivity. All models have a safety electromagnetic micro-switch when hood is opened.



THEY HAVE AN ELECTROMECHANICAL CONTROL PANEL, VERY INTUITIVE AND EASY-TO-MAINTAIN.

EASY | Main Features


Production from 800 to 1200 dishes/hour, depending on the model.

Electromechanical control panel with pilot lights, very easy-to-use.

Tank with internal rounded edges to make cleaning operations easier, avoiding grease and dirt built-up, ensuring maximum hygiene.

2 washing cycles of 90 and 180 seconds, in standard models. 3 washing cycles of 55, 75 and 120 seconds in high-powered models. In addition, in all models continuous cycle up to manual stop. Users could select the washing cycle depending on the type of ware and amount of dirt.


High quality, stainless steel structure guarantees a reliable, robust and durable range with an extended lifetime.

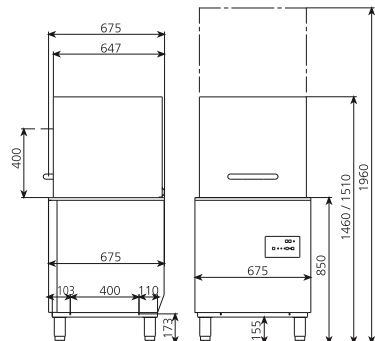



EASY-H500

- Electromechanical control panel.
- 2 washing cycles:
- 90" / 180"
- Tank capacity: 45 l. / Heating power:4.5 kw.
- Booster capacity: 7 l. / Heating power: 6 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 3 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Safety thermostat.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 2 baskets for cutlery CU-7.

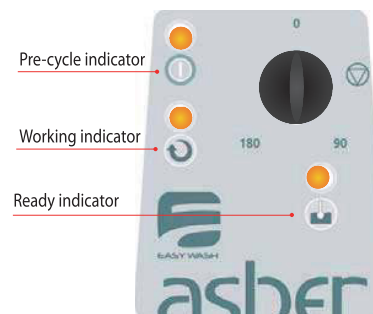


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
EASY-H500	19013512	40	420	675 x 675 x 1440	11,1	380V-50Hz



EASY-H500 B – WITH DRAIN PUMP

- Electromechanical control panel.
- 2 washing cycles:
- 90" / 180"
- Tank capacity: 45 l. / Heating power:4.5 kw.
- Booster capacity: 7 l. / Heating power: 6 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 3 l/rinse.
- Built-in rinse aid dispenser and drain pump.
- Anti backflow valve fitted.
- Safety thermostat.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 2 baskets for cutlery CU-7.

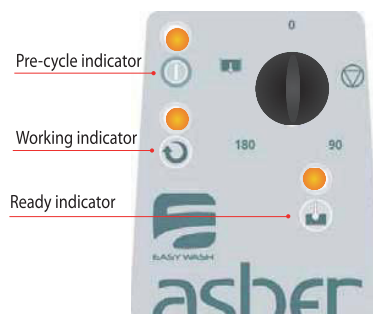


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
EASY-H500 B	19013514	40	420	675 x 675 x 1440	11,1	380V-50Hz



EASY-H500 DD – WITH DETERGENT DISPENSER

- Electromechanical control panel.
- 2 washing cycles:
- 90" / 180"
- Tank capacity: 45 l. / Heating power:4.5 kw.
- Booster capacity: 7 l. / Heating power: 6 kw.
- Wash pump power: 0,6 kw.
- Rinsing consumption: 3 l/rinse.
- Built-in rinse aid dispenser and detergent dispenser.
- Anti backflow valve fitted.
- Safety thermostat.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 2 baskets for cutlery CU-7.

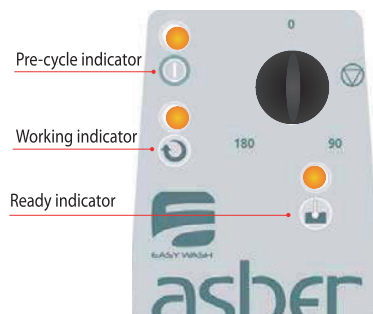

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
EASY-H500 DD	19013513	40	420	675 x 675 x 1440	11,1	380V-50Hz