


COUNTER FREEZER

- Blower System
- Magnetic Solid Door




BS 2DF4/C
BS 2DF5/C
BS 2DF6/C

2 Door



Top View




Front View




BS 3DF7/C
BS 3DF8/C

3 Door

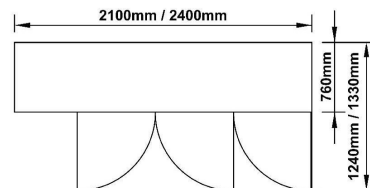

Top View

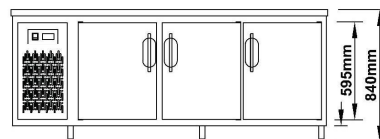

Front View

HIGHLIGHTS

High-density Cyclo-isopentane Polyurethane
insulated body saves energy.

Automatic defrost system
saves energy consumption and provide shortest possible defrost cycle.

Minimum wattage heater
for body to avoid condensation at lowest energy rate.

Large cooling coil heater,
saves energy with short defrost cycle.

Refrigeration system protected from corrosion
by urethane-treated evaporator coil.

Blower system (assisted with fan)
will ensure homogenous coolness in the storage space.

Magnetic and robust stainless door.
Offer a higher tensile strength, which means fewer dents and scratches.

Environmentally friendly refrigerant
(CFC and HCFC Free) R404a.

Effective counter - balanced weight system self
closing door provides smooth, even, positive closure.

127 ~ 152mm adjustable stainless steel legs
or 100mm castor wheel.

2 tier removable and adjustable shelves.

Self contained system
no plumbing required.

Tested at ambient temperature of 38°C,
with no load.

TABLE INFO



	1 DOOR-4'	2 DOOR-5'	2 DOOR-6'	3 DOOR-7'	3 DOOR-8'
MODEL	BS 2DF4/C	BS 2DF5/C	BS 2DF6/C	BS 3DF7/C	BS 3DF8/C
Temperature°C (celsius)	-10 to -18	-10 to -18	-10 to -18	-10 to -18	-10 to -18
External Dimension (mm)	1200 x 760 x 840	1500 x 760 x 840	1800 x 760 x 840	2100 x 760 x 840	2400 x 760 x 840
Internal Dimension (mm)	750 x 635 x 584	1045 x 635 x 584	1350 x 635 x 584	1550 x 635 x 584	1950 x 635 x 584
External Finishing	SS/G1	SS/G1	SS/G1	SS/G1	SS/G1
Internal Finishing	SS	SS	SS	SS	SS
Gross Volume (Litres)	278	387	500	575	723
Voltage/ Frequency (V/ Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Weight (kgs)	88	102	116	138	152
Compressor	1/4Hp	3/8Hp	3/8Hp	1/2Hp	1/2Hp
Wattage (W)	570 - 630	665 - 735	665 - 735	713 - 787	713 - 787
Ampere (A)	3.8 - 4.2	4.1 - 4.5	4.1 - 4.5	4.7 - 5.3	4.7 - 5.3
Energy Consumption (kw/ 24h)	5.8 - 6.4	6.3 - 6.9	7.7 - 8.5	9.6 - 10.6	10.5 - 11.5
Condenser	Air Cooled	Air Cooled	Air Cooled	Air Cooled	Air Cooled
Refrigerant/ Grams	R404a / 440g	R404a / 470g	R404a / 480g	R404a / 520g	R404a / 540g
Defrost System	Electric Heater	Electric Heater	Electric Heater	Electric Heater	Electric Heater
Temperature Control	Digital	Digital	Digital	Digital	Digital
Shelves (Pvc)	4	4	4	6	6
Number Of Clips	16	16	16	24	24
Unit For 20ft Container	22	20	14	14	8
Unit For 40ft Container	46	42	28	28	16

*Note:-
Option : CW - Castor Wheel / BF - Bullet Feet

As product improvement is an on going process, we reserve the right to change specifications or design without notice.