

COUNTER CHILLER

- Blower System
- Magnetic Solid Door




BS 2DC4/C
BS 2DC5/C
BS 2DC6/C


2 Door

BS 3DC7/C
BS 3DC8/C


3 Door




Top View



Front View

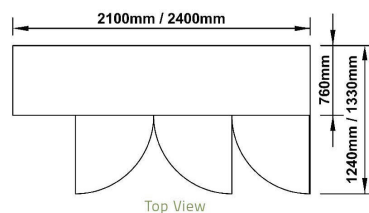

Top View

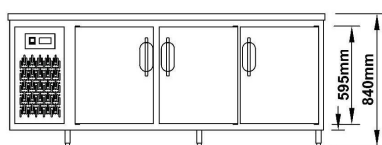

Front View

HIGHLIGHTS

High-density Cyclo-isopentane Polyurethane
insulated body saves energy.

Automatic defrost system
saves energy consumption and provide shortest possible defrost cycle.

Refrigeration system protected from corrosion
by urethane-treated evaporator coil.

Blower system (assisted with fan)
will ensure homogenous coolness in the storage space.

Magnetic and robust stainless steel door.
Offer a higher tensile strength, which means fewer dents and scratches.

Environmentally friendly refrigerant
(CFC and HCFC Free) R134a.

Effective counter - balanced weight system self
closing door provides smooth, even, positive closure.

127 ~ 152mm adjustable stainless steel legs
or 100mm castor wheel.

2 tier removable and adjustable shelves.

Self contained system
no plumbing required.

Tested at ambient temperature of 38°C,
with no load.

TABLE INFO



	2 DOOR-4'	2 DOOR-5'	2 DOOR-6'	3 DOOR-7'	3 DOOR-8'
MODEL	BS 2DC4/C	BS 2DC5/C	BS 2DC6/C	BS 3DC7/C	BS 3DC8/C
Temperature°C (celsius)	+2 to +8	+2 to +8	+2 to +8	+2 to +8	+2 to +8
External Dimension (mm)	1200 x 760 x 840	1500 x 760 x 840	1800 x 760 x 840	2100 x 760 x 840	2400 x 760 x 840
Internal Dimension (mm)	750 x 635 x 584	1045 x 635 x 584	1350 x 635 x 584	1550 x 635 x 584	1950 x 635 x 584
External Finishing	SS/G1	SS/G1	SS/G1	SS/G1	SS/G1
Internal Finishing	SS	SS	SS	SS	SS
Gross Volume (Litres)	278	387	500	575	723
Voltage/ Frequency (V/ Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Weight (kgs)	86	98	112	134	146
Compressor	1/6Hp	1/6Hp	1/4Hp	1/3Hp	1/3Hp
Wattage (W)	380 - 420	475 - 525	570 - 630	618 - 682	618 - 682
Ampere (A)	2.8 - 3.2	3.3 - 3.7	3.8 - 4.2	4.3 - 4.7	4.3 - 4.7
Energy Consumption (kw/ 24h)	2.5 - 2.9	2.8 - 3.2	2.8 - 3.2	4.8 - 5.4	8.4 - 9.2
Condenser	Air Cooled	Air Cooled	Air Cooled	Air Cooled	Air Cooled
Refrigerant/ Grams	R134a / 330g	R134a / 340g	R134a / 360g	R134a / 360g	R134a / 360g
Defrost System	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
Temperature Control	Digital	Digital	Digital	Digital	Digital
Shelves (Pvc)	4	4	4	6	6
Number Of Clips	16	16	16	24	24
Unit For 20ft Container	22	20	14	14	8
Unit For 40ft Container	46	42	28	28	16

*Note:-
Option : CW - Castor Wheel / BF - Bullet Feet

As product improvement is an on going process, we reserve the right to change specifications or design without notice.